



SANYO Presents ‘eneloop’ :

A New Battery in place of Dry Cell Battery for the 21st Century

First ‘Think GAIA’ product - To be on sale from 21st June, 2006 in Singapore

Singapore, 19th June 06-----SANYO Energy(S) Corp., Pte Ltd, the regional sales & marketing office of SANYO Electric Co., Ltd. (SANYO), the world leader in rechargeable batteries, announced a new next-generation nickel metal hydride battery ‘eneloop’ to be sold in Singapore from 21st June,2006. This is the first product based on SANYO’s new vision, ‘Think GAIA’.

‘eneloop’ is a product that proposes a new lifestyle - one without disposing of batteries. Once charged, it can be used repeatedly, and once used completely, it can be recycled. To promote this kind of new battery lifestyle, SANYO developed a world first*¹ rechargeable battery that can be used like a dry cell battery - ‘immediately after purchase’.

Based on its new vision ‘Think GAIA’, SANYO is simultaneously pursuing solutions for a comfortable living and consideration for the environment and would continue providing ‘Global Energy Solutions’ and ‘LOHAS (Lifestyles of Health and Sustainability) Solutions’.

SANYO is participating in CommunicAsia2006 which is held at Singapore Expo, Hall 3, Booth no. 3K2-07 from 20th of June to 23rd of June. More information of eneloop will be provided at the exhibition.

Product pictures are available on the website at www.energy.sanyo.com.sg.

Product Name					
Product	AA Nickel Metal Hydride Battery			AAA Nickel Metal Hydride Battery	
Model Number	HR-3UTG-2BP (Pack of 2 batteries) 	HR-3UTG-4BP (Pack of 4 batteries) 	HR-3UTG-8BP (Pack of 8 batteries) 	HR-4UTG-2BP (Pack of 2 batteries) 	HR-4UTG-4BP (Pack of 4 batteries)
Manufacturer Suggested Retail Price	S\$13.90	S\$25.90	Open price	S\$13.90	S\$25.90
Start of Sales	June 21st, 2006			June 21st, 2006	
Availability In Singapore	Best Denki, Standard Photo, Selffix DIY, Big@Safe, Dufry (Changi Airport)				



Main features:

- 1. ‘Immediately usable’ new rechargeable battery**
- 2. An Environment-friendly product right from the battery to the packaging**
- 3. Comparatively more powerful and longer-lasting than dry cell batteries and superior Low-temperature electrical discharge performance**
- 4. Economically more efficient than dry cell batteries, ‘enloop’ can be used up to 1000*³ times. Also, no need to worry about memory effect**

*1: According to SANYO Research, for Nickel Metal Hydride batteries on the market as of Nov. 1, 2005

*2: Figure based on SANYO brand products sold in Japan only

*3: Battery life based on testing methods established by JIS C8708 2004(4.4) (varies according to conditions of use)

*SANYO is also introducing a mini quick charger set for ‘enloop’ batteries.

enloop Mini Charger Set

Product	Compact quick charger set
Model number	NC-MDR02N-SP (Two AA ‘enloop’ batteries included)
Manufacturer Suggested Retail Price	Open price
Start of Sales	End of July 2006

Main features:


1. ‘Immediately usable’ new rechargeable battery

Batteries have a property to release the stored energy in small amounts (this phenomenon is called ‘self-discharge’). This property is particularly noticeable in rechargeable batteries such as Nickel Metal Hydride Batteries etc. as compared to dry cell batteries, hence disabling rechargeable batteries from becoming batteries that ‘customers can use immediately after purchase’. For this reason, rechargeable batteries couldn’t be used unless charged after purchase and so lagged behind dry cells in convenience. This new product’s main property is that it has introduced great improvements in self-discharge properties (residual ratio after one year of non use is 85%*⁴, in temperature conditions of 20 degree Celsius according to SANYO research). Through this breakthrough development, SANYO has realized a rechargeable battery that can challenge dry cell batteries in user-friendliness through features such as making possible use immediately after purchase or once charged, its ability to be used anytime.

SANYO has been a market leader in nickel metal hydride batteries for the consumer market. The synergy of the following proprietary technologies of SANYO in developing high capacity products has made the successful development of ‘enloop’ possible:

1. high-performance negative electrode ‘super lattice alloy’
2. make-up of battery material and battery plates
3. maintain quality despite being out of use for a long time

These are a few of the technologies that have helped contain self-discharge during the period for which the battery is not in use. Furthermore, it also inhibits voltage reduction even after a long period of being out of use.

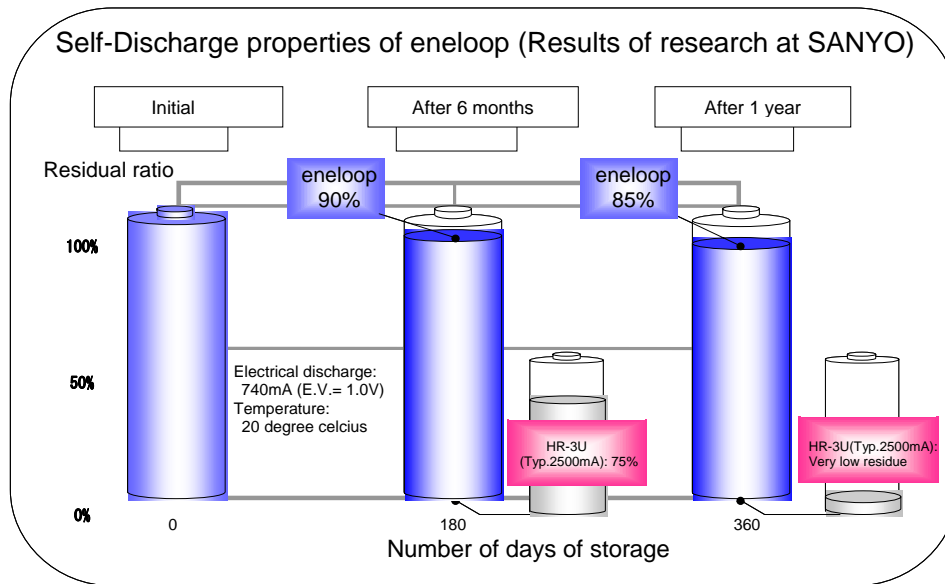

2. An Environment-friendly product right from the battery to the packaging

In order to decrease the amount of waste to the least possible after the product is purchased, SANYO has achieved with this product, an eco-friendly product design, right from the battery itself to its packaging.

(1) Can be used several times over, eliminating the hassle of disposing of batteries.

As a next-generation rechargeable battery that can be ‘used immediately after purchase’, and once charged, ‘can be used anytime’, ‘eneloop’ can be used in all devices that till date use dry cell batteries. Moreover, being rechargeable, ‘eneloop’ can be used 1000 times^{*3} over and without the need to dispose of the dry cell battery each time it is used up, it greatly reduces the troubles involved in the ‘storage and disposal of used dry cell batteries’. Consequently, it makes a remarkable contribution to the reduction of 70,000 tons^{*5} of used dry cell batteries disposed annually in Japan alone.

(2) Environment-friendly design that enables recycling, contributing to conservation of natural resources.

Being a rechargeable battery, ‘eneloop’ has a proper structure for recycling organized by industry groups, unlike dry cell batteries. Once used, ‘eneloop’ is collected, as rechargeable batteries have been, through prescribed recycle boxes installed at 30,000^{*6} electronics retailers throughout the country. Also, through an environment-friendly design, precious resources such as nickel etc. can be reused, thus contributing to efficient use and saving of resources.


(3) Use of particularly environment-friendly and user-friendly battery tube and new package

SANYO has created a tube and external packaging that is free from polyvinyl chloride. The outside packaging made with careful regard to the environment uses recycled PET material and only this material, thus eliminating any hassles when separating garbage at the time of disposal. Moreover, with a whole new original design of the battery tube and package, the battery pack is bound to change your image of battery packaging. Bearing in mind the reusability of the battery, the revolutionary design of the package makes the storage of these batteries more convenient after it has been opened.



3. Comparatively more powerful and longer-lasting than dry cell batteries. Superior low-temperature electrical discharge performance

'eneloop' has been designed so as to extract a lot more power as compared to dry cell batteries. An experiment performed on SANYO's digital camera shows that using 'eneloop' can take 4.4 times^{*7} more pictures than a dry cell battery. Even under low temperature conditions (0 degree Celsius), when it is usually difficult for dry cell batteries to produce power, 'eneloop' displays superior power characteristics and longer power, making it a natural choice for outdoor use at ski resorts etc.

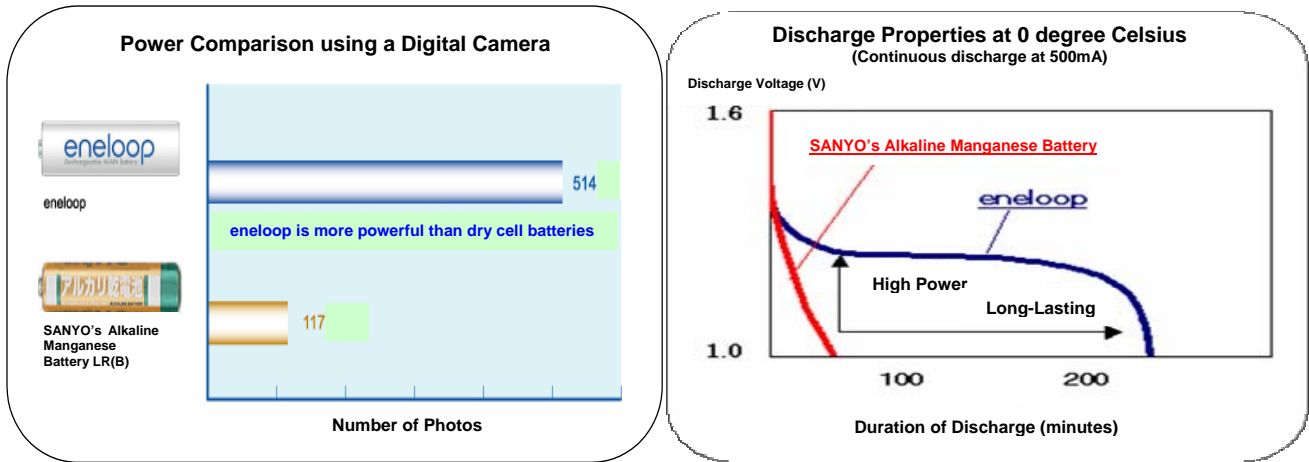

4. More cost-effective than dry cell batteries, 'eneloop' can be used up to 1000 times; just charge it when the battery is out of 'juice.'



'eneloop' holds its charge even when you keep it stored for a long time. You can even use it in all of the devices that are currently using dry cells.

'eneloop' can be used up to 1000 times^{*3}, potentially saving you thousands of dollars over the life of the battery.

Once fully charged, use it when ever you like; it still holds 85% of its charge after one year ^{*4}.

This means you can use eneloop in a full range of products; from alarm clocks & remote controls to power hungry products like digital cameras and MP3players.

'eneloop' Specifications

Product name	'eneloop'	
Product	AA Nickel Metal Hydride Battery	AAA Nickel Metal Hydride Battery
Model Number	HR-3UTG 	HR-4UTG 
Nominal Voltage	1.2V	1.2V
Nominal Capacity ^{*8}	2000mAh	800mAh
Rated Capacity ^{*9}	1900mAh	750mAh
Dimensions	14.35 mm (diameter) X 50.4 mm (height)	10.5 mm (diameter) X 44.5mm (height)
Weight	Approximately 27g	Approximately 13g



Charger Specifications

Product	Compact rapid charger		
Model Number	NC-MDR02N-SP		
Voltage/Frequency	AC100-240V/50-60Hz		
Charge Time	applicable batteries		Charge Time 1-2 batteries
	'eneloop'	AA HR-3UTG (typ.2000mAh, min.1900mAh)	approx. 230 min.
		AAA HR-4UTG (typ.800mAh, min.750mAh)	approx. 135 min.
	Ni MH	AA HR-3U (typ.2300mAh, min.2150mAh)	approx. 265 min.
		AA HR-3U (typ.2100mAh, min.2000mAh)	approx. 240 min.
		AA HR-3U (typ.1700mAh, min.1600mAh)	approx. 195 min.
		AAA HR-4U (typ.900mAh, min.840mAh)	approx. 150 min.
		AAA HR-4U (typ.800mAh, min.700mAh)	approx. 125 min.
Indication Light	Charging : LED on Fully Charged : LED off		
Dimensions	70.5(W) × 27.5 (D) × 74.5(H) mm		
Weight	Approx. 76 grams		

*1: According to SANYO Research, for Nickel Metal Hydride batteries on the market as of Nov. 1, 2005

*2: Figure based on SANYO brand products sold in Japan only

*3: Battery life based on testing methods established by JIS C8708 2004(4.4) (varies according to conditions of use)

*4: Simulation test based on a fully charged AA 'eneloop' battery left for one year at temperature conditions of 20 degree Celsius (Discharge condition: 740mA(E.V.=1.0V). Moreover, the product in use is SANYO's HR-3UF (Type. 2500 mAh, Min. 2300 mAh).

*5: According to Battery Association of Japan's website

*6: According to JBRC's website

*7: Compared to SANYO's alkaline manganese dry cell battery (LR-6G). Conditions: Using SANYO's DSC-S4 digital camera. One pictures every 20 sec. using the flash one out of every three times, LCD on, room temperature. However, depending on the camera and the conditions, the number of pictures will vary.

*8: Actual capacity based on charge/discharge levels as established by JIS C8708 2004 (4.2.1)

*9: Minimum Battery capacity based on charge/discharge levels as established by JIS C8708 2004 (4.2.1)

For Press Contact:

SANYO Energy (S) Corp., Pte Ltd

Regional Sales & Marketing Department, Consumer Products.

Tel: 65-6736-3100 Fax: 65-6737-2335

Email: sales@sanyo-energy.com.sg